


# 2 TON CAPACITY TRIPOD STAND

OPERATING

INSTRUCTIONS PARTS LIST

WARRANTY

meets or exceeds ANSI standard  
for performance and safety.

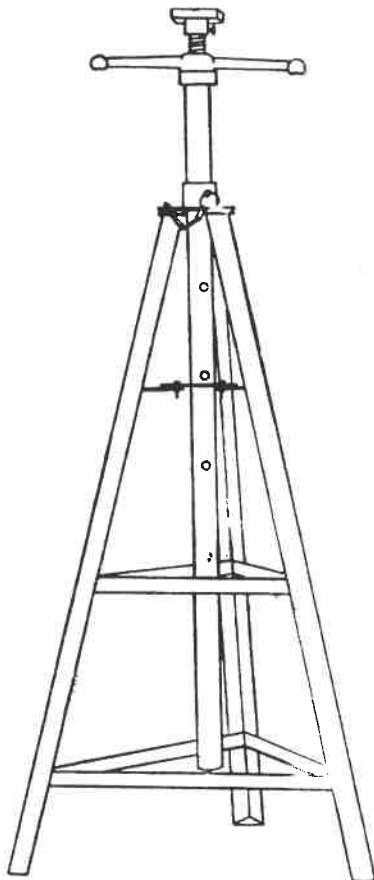

## OWNER'S RESPONSIBILITY

The owner and/or operator shall have an understanding of these operating instructions and warnings before operating the jack. Warning information shall be emphasized and understood. If the operator is not fluent in English, the instructions and warnings shall be read to and discussed with the operator in operator's native language by the purchaser/owner, making sure that the operator comprehends its contents.



## WARNING:



### *For Your Safety & to Prevent Injury*

1. This is NOT a vehicle support stand.
2. DO NOT use this stand beyond its rated capacity.
3. Use this stand to support vehicle components under the vehicle.
4. DO NOT use this stand for lifting the vehicle.
5. Use on hard, level surface. Be sure setup is stable.

## ASSEMBLY INSTRUCTIONS:

- STEP 1: On a clean surface, check and sort package contents according to size and kind.

### ASSEMBLY OF TUBE

- STEP 2: Bolt RUBBER SADDLE PAD (02) and set 4 ALLEN HEAD SCREWS (01) on SADDLE BASE (03).
- STEP 3: Slide SCREW ROD (08) into UPRIGHT TUBE (07), threads facing up. Install BEARING WASHERS (05), BEARINGS (06) and HANDLE (04) on the SCREW ROD (08)
- STEP 4: Install the base of the SADDLE (03) into the SCREW ROD (08)

### ASSEMBLY OF STAND

- STEP 5: Starting at the bottom, connect LONG BRACE SUPPORT (16) TO LEGS (18). DO NOT TIGHTEN BOLTS ALL THE WAY UNTIL ASSEMBLY IS FINISHED.
- STEP 6: Bolt MEDIUM LENGTH SUPPORT BRACE (17) to LEGS (18)
- STEP 7: Bolt LOWER SUPPORT FLANGE (19) to SHORT BRACE STRAP (13) and LEGS (18).
- STEP 8: Install and bolt UPPER SUPPORT FLANGE (22) to top of stand.
- STEP 9: Slide UPRIGHT TUBE (07) assembly into UPPER (22) and LOWER SUPPORT FLANGE (19). Using the DETENT PIN CHAIN ASSEMBLY (12), lock it in any position.
- STEP 10: MAKE SURE ALL BOLTS ARE TIGHTENED BEFORE OPERATING.